



# OPTIFIT CONNECT IRON HOSEL GUIDE

## INTRODUCING THE OPTIFIT CONNECT HOSEL

The OptiFit Connect iron fitting tool is a multi-cog system that offers **9 unique loft and lie configurations** in one adjustable head. Each rotating cog features 3 settings (**+, - and neutral/blank**) to help every player get dialed in for their unique needs.

## ADJUSTING THE OPTIFIT CONNECT HOSEL

1. Remove the head and identify the loft and lie indicators on the hosel.



2. Rotate the cogs to the desired configuration, aligning with the respective loft and lie indicators.

### SEE CHART FOR 9 POSSIBLE COMBINATIONS

*Note: a + and a - together equals no change.*



3. Align the blue dot on the shaft adaptor with the blue dot on the head/hosel.


*Note: Be sure to align the blue dots for both RH and LH heads!*



4. Tighten components with a blue Callaway torque wrench.

## QUICK REMINDER - Sticker On Every Fitting Shaft

+	2° Upright lie or weak loft	+	1° Upright lie or weak loft	+ and - Results in NO CHANGE to loft or lie
-	2° Flat lie or strong loft	-	1° Flat lie or strong loft	
Align Blue Dot on Hosel to Blue Dot on Shaft Sleeve				

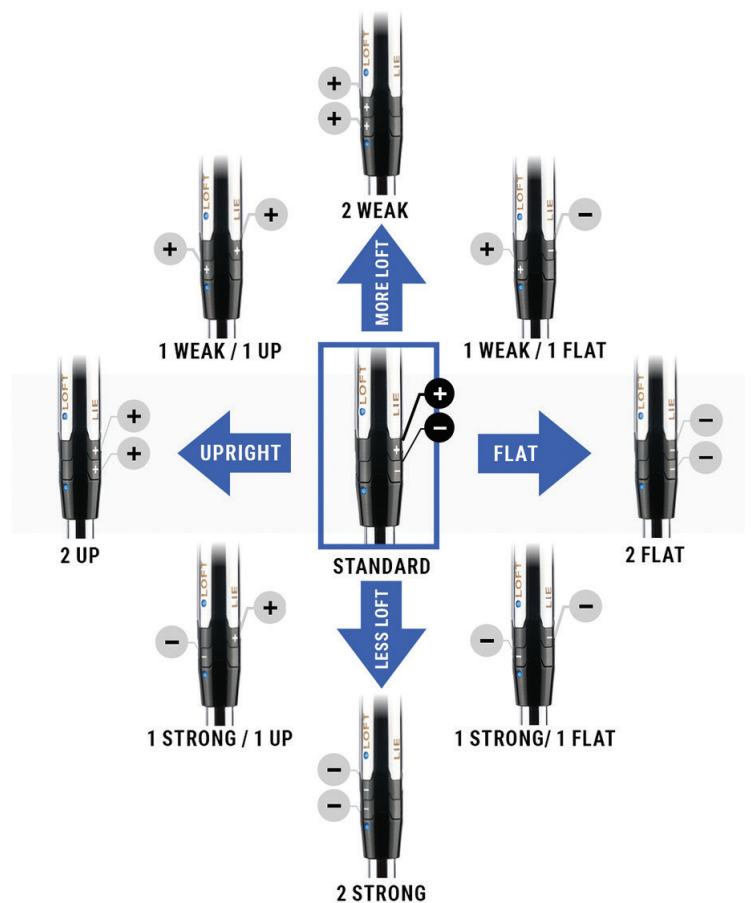

- + will weaken loft OR increase lie angle.
- - will strengthen loft OR decrease lie angle.
- +/- results in no change to loft or lie



Scan to learn more about the new OptiFit Connect iron fitting system.